



LONWORKS NETWORKS COMPATIBLE GATEWAY

NETWORK SOLUTIONS



www.daikin.eu


OPEN NETWORK INTEGRATION OF VRV® MONITORING
AND CONTROL FUNCTIONS INTO LONWORKS NETWORKS

LonWorks is a registered trademark of Echelon company.

MAIN FEATURES

1. OPEN NETWORK INTEGRATION

Daikin has released a new adapter that requires no additional interfaces nor gateways for connection to LonWorks networks equipment and building control systems. LonWorks networks are recognised worldwide as the de facto standard within the building controls industry. LON bus makes it possible to control access, energy management, fire/life/safety, HVAC and lighting etc.

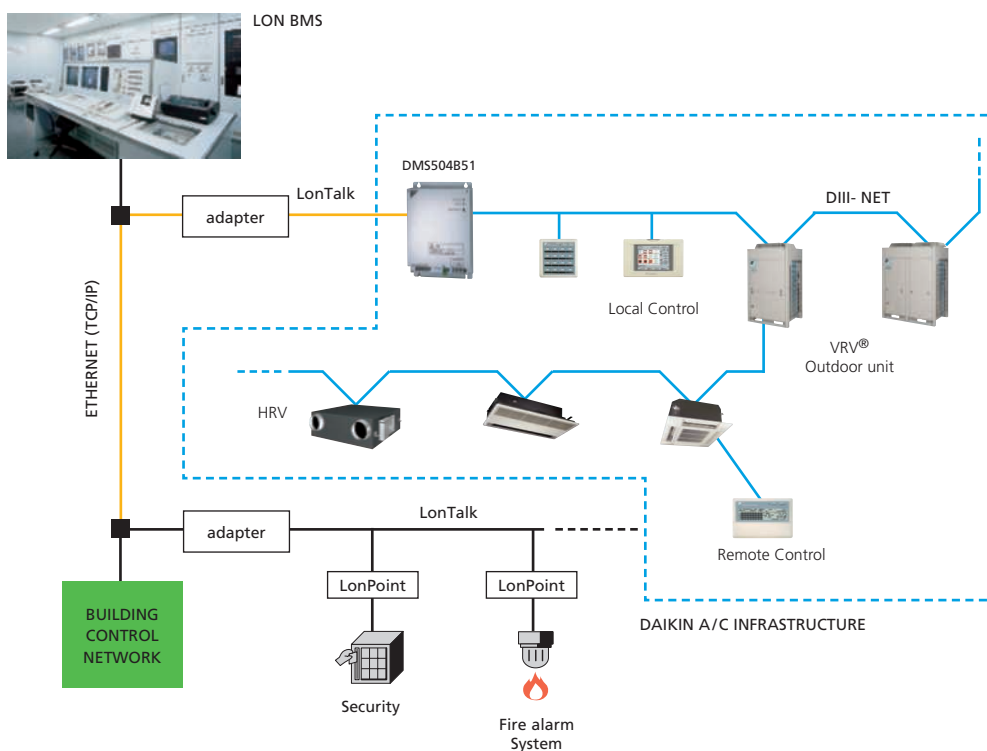

2. QUICK AND EASY INSTALLATION

The open protocol specification gives local system integrators complete design freedom. Also, the ability to combine individual items of equipment into a LonWorks networks reduces the time and costs required for wiring work.

3. UNLIMITED SITE SIZE

The new network adapter can be connected to up to 64 groups, depending on the number of control and monitoring functions used: $300 > (\text{number of indoor units}) \times (\text{number of NV})$

Maximum value is set by the LON BMS manufacturer: in this case 300
Number of connected indoor units: 1 ~ 64.
NV: Number of LON network variables

Please consult your Daikin representative for details.

4. ROHS COMPLIANCE

Restriction of Hazardous Substances in electrical and electronic equipment (2002/95/EC)
Hazardous substances include Lead (Pb), Cadmium (Cd), Hexavalent Chromium (Cr6+), Mercury (Hg), Polybrominated biphenyls (PBB), Polybrominated diphenylether (PBDE).

Although RoHS regulations are only applicable to small and large household equipment, Daikin environmental policy nevertheless ensures that VRV®III will be totally in line with RoHS.

SPECIFICATIONS

ITEM		DESCRIPTION
LonWorks networks compatible Gateway		DMS504B51
Power supply (auto ranging)		1~, AC100 ~ 240V, 50Hz
Dimensions (HxWxD)	mm	260x168x50
Weight	kg	1.5
Power consumption		Max. 5W
Operation range		-10 to 50°C
Storage temperature range		-20 to 60°C
Humidity		Up to 95 % (no condensation)
Protocol		LonTalk
Transmission speed		78kbps
Topology		Free topology
Transmission medium		Twisted pair wire
Installation method		Inside switch boards
Contact input		Forced OFF x 1

ACCESSORIES

ITEM		DESCRIPTION
Interface adapters	KRP928A2S	For connection to Split unit
	DTA102A52	For connection to R-22/R-407C Sky Air units
	DTA112B51	For connection to R-410A Sky Air units

5. CONTROL AND MONITORING FUNCTIONS

Control

- › ON/OFF command
- › Operation mode setting
- › Temperature setting
- › Fan air flow setting
- › Filter sign reset
- › Forced thermostat shut off setting
- › Remote ON/OFF control rejection
- › Remote operation mode control rejection
- › Remote temperature control rejection setting
- › Forced system shutdown setting
- › Timer setting

Monitoring

- › ON/OFF and error status report
- › Operation mode status report
- › Temperature setting report
- › Room temperature report
- › Fan air flow setting report
- › Filter sign report
- › Error report
- › Malfunction code report
- › Thermostat status report
- › Forced thermostat shut off setting report
- › Remote ON/OFF control rejection report
- › Remote operation mode control rejection report
- › Remote temperature setting rejection report
- › Forced system shutdown setting report
- › Unit transmission status





**In all of us,
a green heart**



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues.

For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment.

This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.



Daikin units comply with the European regulations that guarantee the safety of the product.

VRV® products are not within the scope of the Eurovent certification programme.

Daikin products are distributed by:



DAIKIN EUROPE N.V.

Naamloze Vennootschap
Zandvoordestraat 300
B-8400 Oostende, Belgium
www.daikin.eu
BTW: BE 0412 120 336
RPR Oostende